




**VITI AUTOFILETTANTI
SELF TAPPING SCREWS**

C15 CEMENTATE - CARBON STEEL C15 HARDENED
TESTA SVASATA - COUNTERSUNK HEAD
IMPRONTA CROCE POZI - POZI CROSS RECESS
CON PUNTA - WITH POINT

COD 11823

UNI 6955-AB
DIN 7982 - C
ISO 7050

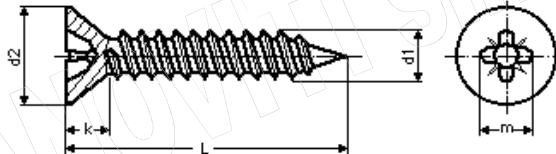

		2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3
d1	min	2,10	2,79	3,43	3,78	4,09	4,65	5,31	6,10
	max	2,24	2,90	3,53	3,91	4,22	4,80	5,46	6,25
d2	min	4,05	5,20	6,44	7,14	7,74	9,14	10,37	11,97
	max	4,30	5,50	6,80	7,50	8,10	9,50	10,80	12,40
k		1,30	1,70	2,10	2,30	2,50	3,00	3,40	3,80
ph		1	1	2	2	2	2	3	3

Lunghezza / Lenght mm.	Diametro / Diameter mm. (*)							
	2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3
4,5								
6,5								
9,5								
13								
16								
19								
22								
25								
32								
38								
45								
50								
57								
63								
70								
75								
80								
90								
100								
110								

PRODUZIONE STANDARD

PRODUZIONE SU RICHIESTA
ON DEMAND



MILANOVITI s.r.l.


FABBRICA VITERIE

VITI AUTOFILETTANTI SELF TAPPING SCREWS

INOX A2 - STAINLESS STEEL A2
TESTA SVASATA – COUNTERSUNK HEAD
IMPRONTA CROCE POZI – POZI CROSS RECESS
CON PUNTA - WITH POINT

COD 12008

UNI 6955-AB
DIN 7982 - C
ISO 7050

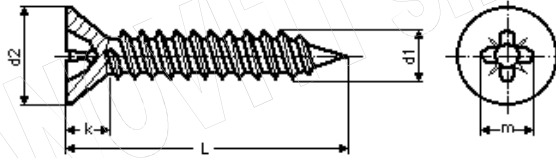

		2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3
d1	min	2,10	2,79	3,43	3,78	4,09	4,65	5,31	6,10
	max	2,24	2,90	3,53	3,91	4,22	4,80	5,46	6,25
d2	min	4,05	5,20	6,44	7,14	7,74	9,14	10,37	11,97
	max	4,30	5,50	6,80	7,50	8,10	9,50	10,80	12,40
k		1,30	1,70	2,10	2,30	2,50	3,00	3,40	3,80
ph		1	1	2	2	2	2	3	3

Lunghezza / Lenght mm.	Diametro / Diameter mm. (*)							
	2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3
4,5								
6,5								
9,5								
13								
16								
19								
22								
25								
32								
38								
45								
50								
57								
63								
70								
75								
80								
90								
100								

PRODUZIONE STANDARD

PRODUZIONE SU RICHIESTA
ON DEMAND



MILANOVITI s.r.l.


FABBRICA VITERIE

VITI AUTOFILETTANTI SELF TAPPING SCREWS

INOX A4 - STAINLESS STEEL A4
TESTA SVASATA – COUNTERSUNK HEAD
IMPRONTA CROCE POZI – POZI CROSS RECESS
CON PUNTA - WITH POINT

COD 14002

UNI 6955-AB
DIN 7982 - C
ISO 7050

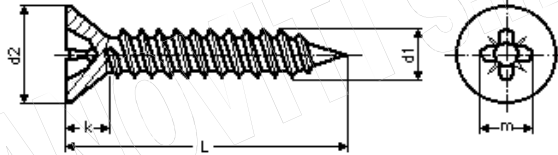

		2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3
d1	min	2,10	2,79	3,43	3,78	4,09	4,65	5,31	6,10
	max	2,24	2,90	3,53	3,91	4,22	4,80	5,46	6,25
d2	min	4,05	5,20	6,44	7,14	7,74	9,14	10,37	11,97
	max	4,30	5,50	6,80	7,50	8,10	9,50	10,80	12,40
k	min	1,30	1,70	2,10	2,30	2,50	3,00	3,40	3,80
ph		1	1	2	2	2	2	3	3

Lunghezza / Lenght mm.	Diametro / Diameter mm. (*)							
	2,2	2,9	3,5	3,9	4,2	4,8	5,5	6,3
4,5								
6,5								
9,5								
13								
16								
19								
22								
25								
32								
38								
45								
50								
60								
70								
80								
90								
100								

PRODUZIONE STANDARD

PRODUZIONE SU RICHIESTA
ON DEMAND