




### VITI AUTOFORANTI SELF DRILLING SCREWS

C15 CEMENTATE - CARBON STEEL C15 HARDENED  
TESTA CILINDRICA - PAN HEAD  
IMPRONTA CROCE PHILLIPS - CROSS RECESS PHILLIPS

COD 11814

UNI 8118  
DIN 7504 - M  
ISO 15481

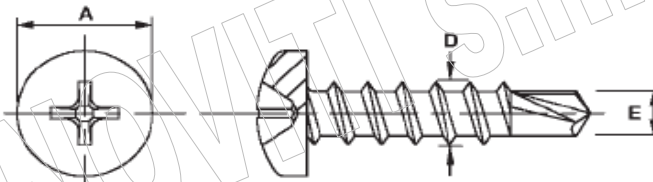

		2,9	3,5	3,9	4,2	4,8	5,5	6,3
A	min	5,30	6,54	7,14	7,84	9,14	10,37	12,07
	max	5,60	6,90	7,50	8,20	9,50	10,80	12,50
D	min	2,76	3,35	3,73	4,04	4,62	5,28	6,03
	max	2,90	3,53	3,91	4,22	4,80	5,46	6,25
E	min	2,25	2,70	3,00	3,35	3,80	4,40	5,30
	max	2,40	2,85	3,15	3,60	4,10	4,80	5,70
ph		1	2	2	2	2	3	3

Lunghezza / Lenght mm.	Diametro / Diameter mm. (*)							
	2,9	3,5	3,9	4,2	4,8	5,5	6,3	
4,5								
6,5								
9,5								
13								
16								
19								
22								
25								
32								
38								
45								
50								
60								
70 / 60								
80 / 60								
90 / 70								
100 / 70								
110 / 60								
120 / 60								

                     PRODUZIONE STANDARD